USB MIFARE® READER/WRITER : CSB4-U

DETAILED VIEWS

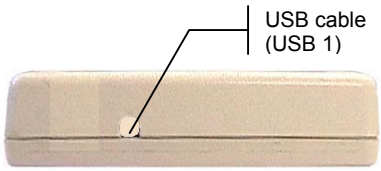

REAR VIEW

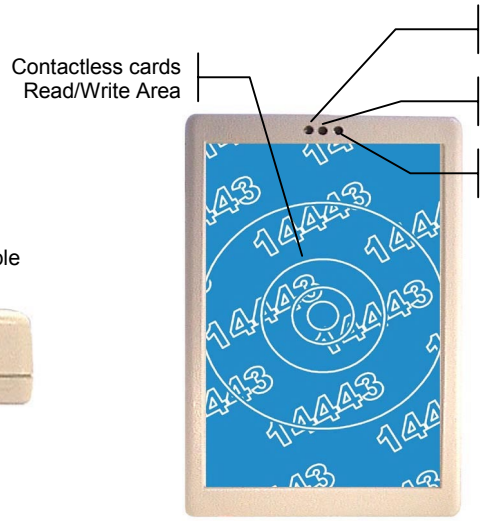

TOP VIEW

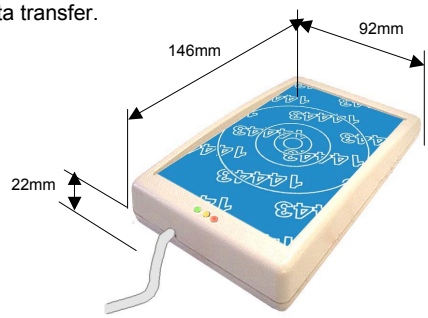

PERSPECTIVE VIEW

WIRING SCHEME

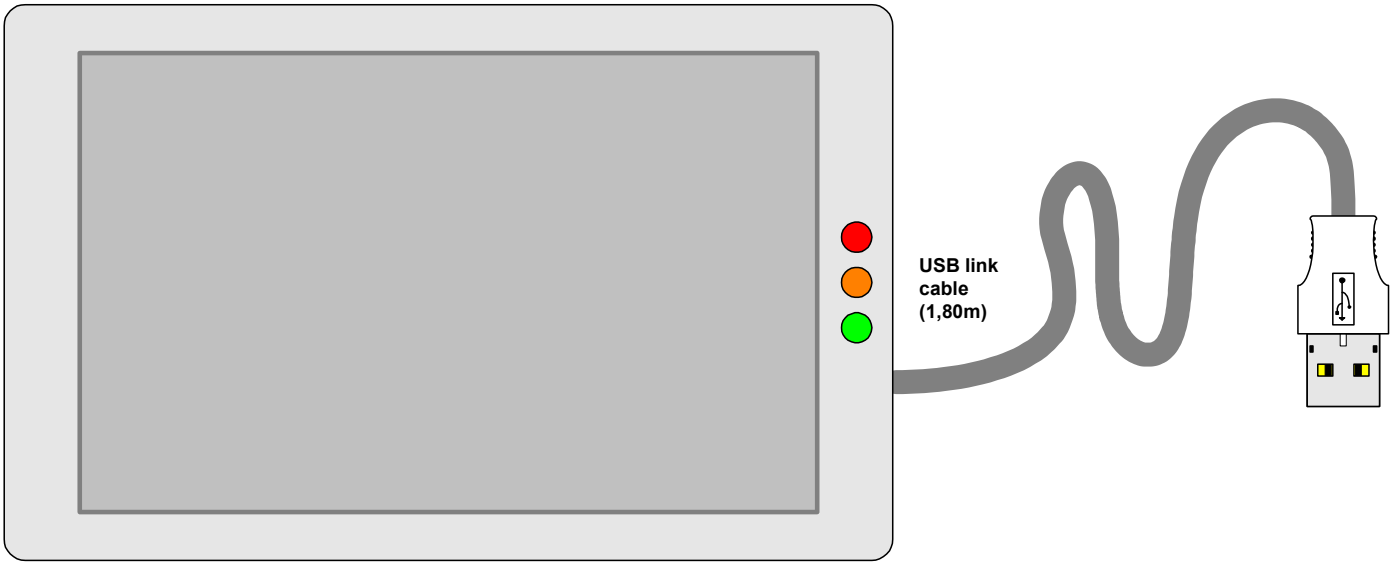

FEATURES

Description ..... USB MIFARE® Reader / Writer

Power supply ..... USB
Consumption 120mA

Reading range ..... 0 cm → 8 cm (MIFARE STANTARD 1K)

Chipset ..... RC531 Philips®
ISO compliance ISO14443-A/B
Compliance ..... MIFARE® Classic
MIFARE® UltraLight
MIFARE® Pro / ProX
MIFARE® DESFire

Temperature range ..... 0°C → +45°C
Dimensions ..... L : 146mm, w : 92mm, h : 22mm
Weight ..... 250 g

LEDs ..... → Red : Power (progressive flickering)
Fault (lit continuous)
→ Orange : controlled by application
→ Green : Data Transfer

Connections ..... USB link cable (1.80m)

Conformity ..... Standard CE : EN50082/EN55022 class B

Material ABS-94HB
Color ..... PC Bone
Self-extinction UL94

Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of PRO ACTIVE. PRO ACTIVE and the PRO ACTIVE logo are registered trademarks of PRO ACTIVE S.A.R.L. MIFARE and Philips areregistered trademarks of Philips.

DATASHEET USB MIFARE® READER/WRITER : CSB4-U

PRO ACTIVE
PARC GUTENBERG
13 VOIE LA CARDON
F-91120 PALAISEAU
France

phone. : +33 1 64 53 20 10
Fax : +33 1 64 53 20 18

mail : info@pro-active.fr
web : www.pro-active.fr

S.A.R.L. with the capital of 15 252€
R.C.S. EVRY B 429 665 482
A.P.E. 722Z
VAT #. FR27 429 665 482 00015