


OEM Reader/Writer - 125kHz

The BrightCard OEM Reader/Writer 125kHz has been designed for the support of all EM Read Only and Read/Write and NXP Hitag tags (including Hitag S).

The BrightCard 125kHz RFID Reader/Writer comes with integrated antenna. USB or RS232 interface allow easy use.

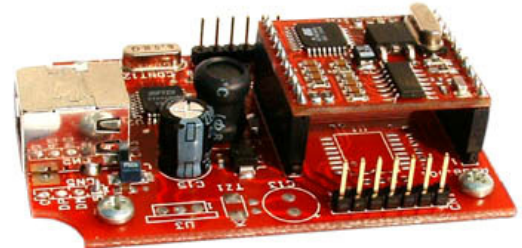

Applications:

- Desktop Readers / Encoders
- Printers
- Access Control

Product specification:

Interface:	USB or RS232
Integrated antenna:	Yes
Operating system:	Window, Linux
Power Supply:	5Vdc/60mA - Bus-self powered
Signals:	1 LED red + 1 LED two coloured
Temperature of use:	-20 °C...+50 °C
Supported transponders:	EM 4102 EM 4550 NXP Hitag 1/2 NXP Hitag S
Reading range:	with ISO card EM4102: 7cm
Dimensions:	70 x 47.5 x 18 mm
Order number:	R-OEM-125-USB (USB) R-OEM-125-232 (RS232)

Technology by:

iD TRONIC
Electronic Identification